





**HI-LITE MFG.
CO., INC.**
13450 Monte Vista Avenue
Chino, California 91710
Telephone: (909) 465-1999
Fax: (909) 465-0907

Job Name: _____
Type: _____
Quantity: _____

Item Number	Height (A)	Width (B)	Item Number	Height (A)	Width (B)
H-15008	5 1/2"	8"	H-15116	8 3/4"	16"
H-15010	8"	10"	H-15117	8 1/2"	17"
H-15111	8"	11"	H-15118	10"	18"
H-15112	8"	12"	H-15120	10 3/4"	20"
H-15113	8"	13"	H-15124	16"	24"
H-15114	8 1/2"	14"	H-15127	17 1/2"	27"
H-15115	7"	15"			

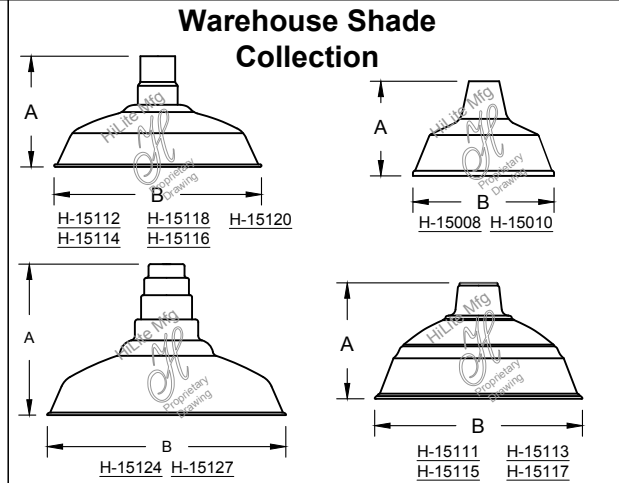

Fixture No.	Fixture Color	Mounting	Mounting Color	Optional Accessories	Accessory Color	Wattage/ Lamp options	Ballast	Voltage
H-15008 (1) (8)	Standard (2) 91 (Black)	Mounting Options 1/2" 3/4"	Standard 91 (Black)	CGU (Cast guard & glass)	Standard 91 (Black)	Incandescent (7) (Fixture is standard 100W or 200W. Do not specify.)	Ballast option not available for INC.	Incandescent (Fixture is standard 120V. Do not specify.)
H-15010 (1) (8)	93 (White)	Cord Options (3) CB8 (8' Blk Cord) CW8 (8' Wht Cord) CG8 (8' Gray Mesh Cord)	93 (White)	LCGU (Large cast guard & glass)	93 (White)	CFL (4) (7) (Compact Fluorescent) 13/CFL 18/CFL 26/32/42/CFL 26/CFL 32/CFL 42/CFL 57/CFL	RB (5) (Remote)	CFL M (Multi 120/277V)
H-15111 (1)	95 (Dk. Grn)	Custom Cord (3) Options CB__ (Black) CW__ (White) CG__ (Gray Mesh) Specify length.	95 (Dk. Grn)	WGU (Wire guard & glass)	95 (Dk. Grn)	DMB (Dimmable Ballast for CFL. Add to Part No.)	BCM (Canopy Mount)	HID RB and BCM M (Multi 120/208/240/277V)
H-15112	96 (Galv.)	Stem Options (Stem 1/2") __ST Specify length and canopy.	96 (Galv.)	LWGU (Large wire guard & glass)	96 (Galv.)	HID (4) (High Intensity Discharge)	PLB (6) (Postline)	PLB 1 (120V) 2 (277V)
H-15113	BR47 (Rust)	Flush Mount Options FHSC FSMC	BR47 (Rust)	ARN (Acorn globe)	BR47 (Rust)	MH (4) (7) (Metal Halide) 35/MH 50/MH 70/MH 100/MH 150/MH 175/MH	For specs see pages 341-343.	
H-15114	BK01, GN20.	Arm Options B-1 HL-K HL-A HL-U HL-H P-1 HL-C P-3 HL-D		LARN (Large acorn globe)		HPS (4) (7) (High Pressure Sodium) 50/HPS 70/HPS 100/HPS 150/HPS		
H-15115	Upgraded (2) Finishes 29, 66, 82, 92, 94, 97, 100, 103, 104, 105, 112, 113, 114, 117, 118, 119, 127, 128, 133, 134, 135, 136, 139, 140, 11, 98, 101, 102, 137, 121, 122, 123, 124, 01, 22, 25, 33, 77, 89, 24, 44, 48, 49, 15, 16, 55.	For all arms and specs see pages 321-344.		WGR (Wire guard)		LED (8) See LED specification sheet.	LED See specifications for complete part number.	LED See specifications for complete part number.
H-15116	29, 66, 82, 92, 94, 97, 100, 103, 104, 105, 112, 113, 114, 117, 118, 119, 127, 128, 133, 134, 135, 136, 139, 140, 11, 98, 101, 102, 137, 121, 122, 123, 124, 01, 22, 25, 33, 77, 89, 24, 44, 48, 49, 15, 16, 55.		For all finishes see pages 344-348.	SK (Swivel knuckle)				
H-15117	103, 104, 105, 112, 113, 114, 117, 118, 119, 127, 128, 133, 134, 135, 136, 139, 140, 11, 98, 101, 102, 137, 121, 122, 123, 124, 01, 22, 25, 33, 77, 89, 24, 44, 48, 49, 15, 16, 55.			FX (Flexible tubing for cord mounted fixture only)				
H-15118	112, 113, 114, 117, 118, 119, 127, 128, 133, 134, 135, 136, 139, 140, 11, 98, 101, 102, 137, 121, 122, 123, 124, 01, 22, 25, 33, 77, 89, 24, 44, 48, 49, 15, 16, 55.			For specs and glass color see pages 321-344.				
H-15119	117, 118, 119, 127, 128, 133, 134, 135, 136, 139, 140, 11, 98, 101, 102, 137, 121, 122, 123, 124, 01, 22, 25, 33, 77, 89, 24, 44, 48, 49, 15, 16, 55.							
H-15120	127, 128, 133, 134, 135, 136, 139, 140, 11, 98, 101, 102, 137, 121, 122, 123, 124, 01, 22, 25, 33, 77, 89, 24, 44, 48, 49, 15, 16, 55.							
H-15124	134, 135, 136, 139, 140, 11, 98, 101, 102, 137, 121, 122, 123, 124, 01, 22, 25, 33, 77, 89, 24, 44, 48, 49, 15, 16, 55.							
H-15127	139, 140, 11, 98, 101, 102, 137, 121, 122, 123, 124, 01, 22, 25, 33, 77, 89, 24, 44, 48, 49, 15, 16, 55.							



ORDER EXAMPLE
(USE THIS FORMAT TO PLACE ORDER)

Notes:

- H-15008, H-15010 and H-15111 available for 100W Max INC. H-15008 and H-15010 not available with glass enclosures.
- For interior finish of fixture refer to color chart on pages 344-348. H-15124 and H-15127 not available in copper or brass finish.
- Cord Mounting wattage not to exceed 100 for HID. Gray Mesh Cord not available for HID.
- Requires Globe Option. (See pages 339-341 for Globe Options) Max Wattages for CGU and WGU are 100W INC, 32W CFL and 100W HID Max Wattages for LWGU, LCGU, ARN and LARN are 200W INC, 57W CFL, 175W HID and no changes.

- (RB) Remote Ballast not available for Fluorescent Lamping.
- (PLB) Post Line Ballast must specify 120V or 277V. (PLB) 50W MH requires a 3" dia. pole. (PLB) 70W and 100W MH require a 4" dia. pole. (PLB) 50W, 70W, 100W and 150W HPS require a 3" dia. pole.
- Socket Bases: INC and HID are medium base. CFL is GX24Q.
- H-15008 and H-15010 not Available in LED.

Cord-hung fixtures: suitable for dry location only.
Stem-hung fixtures: suitable for damp & dry location.
Gooseneck, post mount & wall bracket fixtures: suitable for wet, damp & dry location.