




**HI-LITE MFG.  
CO., INC.**  
13450 Monte Vista Avenue  
Chino, California 91710  
Telephone: (909) 465-1999  
Fax: (909) 465-0907

Job Name: \_\_\_\_\_  
Type: \_\_\_\_\_  
Quantity: \_\_\_\_\_

Fixture No.	Height (A)	Width (B)
H-91408	7 1/2"	8"
H-91410	7 3/4"	10"
H-91412	9"	12"
H-91414	9 1/2"	14"
H-91416	10"	16"
H-91418	12 1/2"	18"
H-91420	13"	20"
H-91422	14"	22"
H-91424	15"	24"

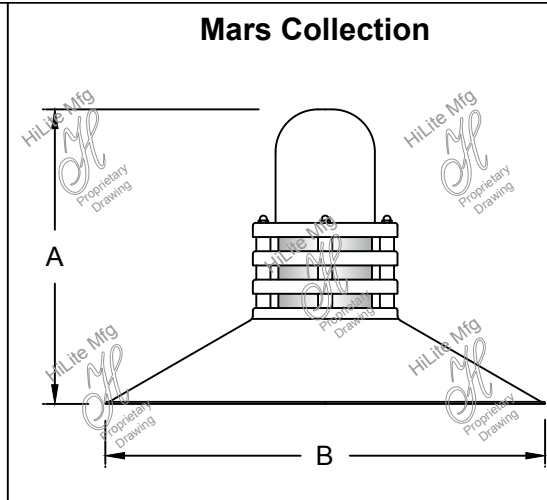

Fixture No.	Fixture Color	Glass Color	Mounting	Mounting Color	Optional Accessories	Accessory Color	Wattage/Lamp options	Ballast	Voltage
<b>H-91408</b> (1) <b>H-91410</b> (1) <b>H-91412</b> (1) <b>H-91414</b> (1) <b>H-91416</b> (1) <b>H-91418</b> (1) <b>H-91420</b> (1) <b>H-91422</b> (1) <b>H-91424</b> (1)	Standard (2) 91 (Black) 93 (White) 95 (Dk. Grn) 96 (Galv.) BR47 (Rust) BK01, GN20.  Upgraded (2) Finishes. 29, 66, 82, 92, 94, 97, 100, 103, 104, 105, 112, 113, 114, 117, 118, 119, 127, 128, 133, 134, 135, 136, 98, 101, 102, 137, 139, 140, 121, 122, 123, 124, 11, 01, 22, 25, 33, 77, 89, 24, 44, 48, 49, 15, 16.  For finish specs see pages 344-348.	<b>CLR</b> (Clear)  <b>RIB</b> (Clear Ribbed)  <b>FR</b> (Frost)  <b>RD</b> (Red)  <b>BL</b> (Blue)  <b>GRN</b> (Green)  <b>AM</b> (Amber)  <b>AMC</b> (Amber Crackle)	Mounting Options 1/2" 3/4"  Cord Options(3) CB8 (8' Blk Cord) CW8 (8' Wht Cord) CG8 (8' Gray Mesh Cord)  Custom Cord Options(3) CB___ (Black) CW___ (White) CG___ (Gray Mesh) Specify length.  Stem Options (Stem 1/2") ___ST Specify length and canopy. HSC (Canopy) SMC (Canopy)  Flush Mount Options FHSC FSMC  Arm Options B-1 HL-K HL-A HL-U HL-H P-1 HL-C P-3 HL-D  For all arms and specs see pages 321-344.	Standard 91 (Black) 93 (White) 95 (Dk. Grn) 96 (Galv.) BR47 (Rust)  For all finishes see pages 344-348.	<b>SK</b> (Swivel knuckle)  <b>FX</b> (Flexible tubing for cord mounted fixture only)  <b>CAL</b> (Clear Acrylic Layer)  <b>BAL</b> (Blue Acrylic Layer)  <b>RAL</b> (Red Acrylic Layer)  <b>GNAL</b> (Green Acrylic Layer)  For specs see pages 321-344.	Standard 91 (Black) 93 (White) 95 (Dk. Grn) 96 (Galv.) BR47 (Rust)  For all finishes see pages 344-348.	Incandescent (6) (Fixture is standard 100W or 200W. Do not specify.)  CFL (6) (Compact Fluorescent) 13/CFL 18/CFL 26/32/42/CFL 26/CFL 32/CFL 42/CFL 57/CFL  DMB (Dimmable Ballast for CFL. Add to Part No.)  HID (High Intensity Discharge)  MH (6) (Metal Halide) 35/MH 50/MH 70/MH 100/MH 150/MH 175/MH  HPS (6) (High Pressure Sodium) 50/HPS 70/HPS 100/HPS 150/HPS  LED See LED specification sheet.	Ballast option not available for INC.  <b>RB</b> (4) (Remote)  <b>BCM</b> (Canopy Mount)  <b>PLB</b> (5) (Postline)  For specs see pages 341-343.	Incandescent (Fixture is standard 120V. Do not specify.)  CFL <b>M</b> (Multi 120/277V)  HID RB and BCM <b>M</b> (Multi 120/208/240/277V)  PLB 1 (120V) 2 (277V)  LED See specifications for complete part number.

H-91408 - 91 - CLR / 1/2" - 91 / SK - 91 / 13/CFL - BCM - M

**ORDER EXAMPLE**  
(USE THIS FORMAT TO PLACE ORDER)

**Notes:**

(1) H-91408, H-91410, H-91412, H-91414 and H-91416 available for 100W Max INC, 32W Max CFL and 100W Max HID.  
H-91418, H-91420, H-91422 and H-91424 available for 200W Max INC, 57W Max CFL and 175W Max HID.

(2) For interior finish of fixture refer to color chart on pages 344-348.

(3) Cord Mounting wattage not to exceed 100 for HID. Gray Mesh Cord not available for HID.

(4) (RB) Remote Ballast not available for Fluorescent Lamping.

(5) (PLB) Post Line Ballast must specify 120V or 277V. (PLB) 50W MH requires a 3" dia. pole. (PLB) 70W and 100W MH require a 4" dia. pole. (PLB) 50W, 70W, 100W and 150W HPS require a 3" dia. pole.

(6) Socket Bases: INC and HID are medium base. CFL is GX24Q.

**Cord-hung fixtures:** suitable for dry location only.  
**Stem-hung fixtures:** suitable for damp & dry location.  
**Gooseneck, post mount & wall bracket fixtures:** suitable for wet, damp & dry location.