




**HI-LITE MFG.
CO., INC.**
13450 Monte Vista Avenue
Chino, California 91710
Telephone: (909) 465-1999
Fax: (909) 465-0907

Job Name: _____
Type: _____
Quantity: _____

Fixture No.	Height (A)	Width (B)
H-16212	12"	12"
H-16214	13 1/4"	14"
H-16216	14"	16"
H-16218	15 1/2"	19 1/2"
H-16224	18"	24"

Cast Guard Deep Bowl Shade Collection

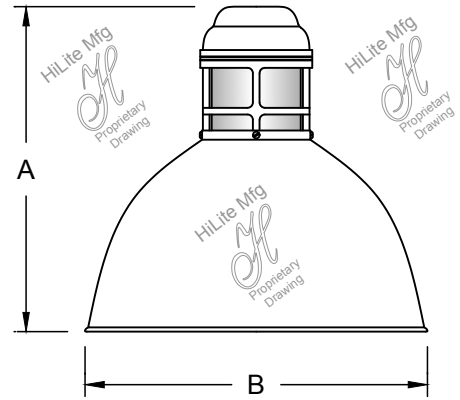

Fixture No.	Fixture Color	Glass Color	Mounting	Mounting Color	Optional Accessories	Accessory Color	Wattage/Lamp options	Ballast	Voltage
H-16212 (1)	Standard (2) 91 (Black) 93 (White)	CLR (Clear)	Mounting Options 1/2" 3/4"	Standard 91 (Black) 93 (White) 95 (Dk. Grn) 96 (Galv.)	SK (Swivel knuckle)	Standard 91 (Black) 93 (White) 95 (Dk. Grn) 96 (Galv.)	Incandescent (6) (Fixture is standard 100W or 200W. Do not specify.)	Ballast option not available for INC.	Incandescent (Fixture is standard 120V. Do not specify.)
H-16214 (1)	95 (Dk. Grn) 96 (Galv.)	RIB (Clear Ribbed)	Cord Options ⁽³⁾ CB8 (8' Blk Cord) CW8 (8' Wht Cord) CG8 (8' Gray Mesh Cord)	BR47 (Rust)	FX (Flexible tubing for cord mounted fixture only)	BR47 (Rust)	CFL (6) (Compact Fluorescent) 13/CFL 18/CFL 26/32/42/CFL 26/CFL 32/CFL 42/CFL 57/CFL	RB (4) (Remote)	CFL M (Multi 120/277V)
H-16216 (1)	BR47 (Rust)	FR (Frost)	Custom Cord Options ⁽³⁾ CB (Black) CW (White) CG (Gray Mesh) Specify length.	For all finishes see pages 344-348.	For specs see pages 321-344.	For all finishes see pages 344-348.	DMB (Dimmable Ballast for CFL. Add to Part No.)	BCM (Canopy Mount)	HID RB and BCM M (Multi 120/208/240/277V)
H-16218 (1)	Upgraded (2) Finishes. 29, 66, 82, 92, 94, 97, 100, 103, 104, 105, 112, 113, 114, 117, 118, 119, 127, 128, 133, 134, 135, 136, 98, 101, 102, 137, 139, 140, 121, 122, 123, 124, 11, 01, 22, 25, 33, 77, 89, 24, 44, 48, 49.	RD (Red)	Stem Options (Stem 1/2") ST Specify length and canopy. HSC (Canopy) SMC (Canopy)				HID (High Intensity Discharge)	PLB (5) (Postline)	PLB 1 (120V) 2 (277V)
H-16224 (1)	For finish specs see pages 344-348.	BL (Blue) GRN (Green) AM (Amber) AMC (Amber Crackle)	Flush Mount Options FHSC FSMC				MH (6) (Metal Halide) 35/MH 50/MH 70/MH 100/MH 150/MH 175/MH	For specs see pages 341-343.	
			Arm Options B-1 HL-K HL-A HL-U HL-H P-1 HL-C P-3 HL-D				HPS (6) (High Pressure Sodium) 50/HPS 70/HPS 100/HPS 150/HPS		
			For all arms and specs see pages 321-344.				LED See LED specification sheet.	LED See specifications for complete part number.	LED See specifications for complete part number.

H-16212 - 91 - CLR / 1/2" - 91 / SK - 91 / 13/CFL - BCM - M

ORDER EXAMPLE
(USE THIS FORMAT TO PLACE ORDER)

Notes:

- (1) H-16212 available for 100W Max INC, 32W Max CFL and 100W Max HID.
H-16214, H-16216, H-16218 and H-16224 available for 200W Max INC, 57W Max CFL and 175W Max HID.
- (2) For interior finish of fixture refer to color chart on pages 344-348.
H-16216, H-16218 and H-16224 not available in copper or brass finish.
- (3) Cord Mounting wattage not to exceed 100 for HID.
Gray Mesh Cord not available for HID.
- (4) (RB) Remote Ballast not available for Fluorescent Lamping.
- (5) (PLB) Post Line Ballast must specify 120V or 277V.
(PLB) 50W MH requires a 3" dia. pole.
(PLB) 70W and 100W MH require a 4" dia. pole.
(PLB) 50W, 70W, 100W and 150W HPS require a 3" dia. pole.
- (6) Socket Bases: INC and HID are medium base. CFL is GX24Q.

Cord-hung fixtures: suitable for dry location only.
Stem-hung fixtures: suitable for damp & dry location.
Gooseneck, post mount & wall bracket fixtures: suitable for wet, damp & dry location.