




**HI-LITE MFG.
CO., INC.**

13450 Monte Vista Avenue
Chino, California 91710
Telephone: (909) 465-1999
Fax: (909) 465-0907

Job Name: _____
Type: _____
Quantity: _____

Titan Collection

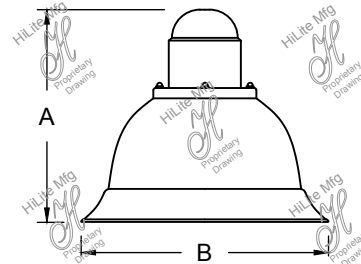

Item Number	Height (A)	Width (B)
H-51008	7 1/2"	8"
H-51012	10"	12"
H-51014	12"	14"
H-51016	14"	16"

Item Number	Height (A)	Width (B)
H-51018	17"	18"
H-51022	21"	22"
H-51025	22"	25"

Fixture No.	Fixture Color	Mounting	Mounting Color	Optional Accessories	Accessory Color	Wattage/Lamp options	Ballast	Voltage
H-51008 (1)	Standard (2)	Mounting Options	Standard	CGU (Cast guard and glass)	Standard	Incandescent (9)	Ballast option not available for INC.	Incandescent (Fixture is standard 100W or 200W. Do not specify.)
H-51012	91 (Black)	1/2"	91 (Black)	LCGU (Large cast guard and glass)	91 (Black)	CFL (5) (9)	RB (6)	CFL
H-51014	93 (White)	3/4"	93 (White)	WGU (Wire guard and glass)	93 (White)	(Compact Fluorescent)	BCM	(Fixture is standard 120V. Do not specify.)
H-51016	95 (Dk. Grn)	Cord Options (3)	95 (Dk. Grn)	WGU (Wire guard and glass)	95 (Dk. Grn)	13/CFL	(Remote)	CFL
H-51018	96 (Galv.)	CB8 (8' Blk Cord)	96 (Galv.)	WGU (Wire guard and glass)	96 (Galv.)	18/CFL	BCM	(Multi 120/277V)
H-51022	BR47 (Rust)	CW8 (8' Wht Cord)	BR47 (Rust)	WGU (Wire guard and glass)	BR47 (Rust)	26/32/42/CFL	PLB (7)	HID
H-51025	GN20	CG8 (8' Gray Mesh Cord)	For all finishes see pages 344-348.	WGU (Wire guard and glass)	For BGPC and BGPD (Bottom Glass Panel Color)	26/CFL	(Postline)	RB, BCM and OBB
	Upgraded Finishes.	Custom Cord Options (3)		WGU (Wire guard and glass)	HI (Honey IRR)	32/CFL	OBB	(Multi 120/208/240/277V)
	29, 66, 82, 92, 94, 97, 100, 103, 104, 105, 112, 113, 114, 117, 118, 119, 127, 128, 133, 134, 135, 136, 98, 101, 102, 137, 139, 140, 121, 122, 123, 124, 11, 01, 22, 25, 33, 77, 89, 24, 44, 48, 49, 15, 16.	CB (Black)		WGU (Wire guard and glass)	OP (Opal)	42/CFL	(Onboard)	PLB
	For finish specs see pages 344-348.	CW (White)		ARN (Acorn globe)	CLR (Clear)	57/CFL	OBB (8)	1 (120V)
		CG (Gray Mesh)		LARN (Large acorn globe)	FR (Frost)	DMB	(Fluorescent Options 13W-57W)	2 (277V)
		Specify length.		WGR (Wire guard)	CLD (Cloud)	(Dimmable Ballast for CFL. Add to Part No.)	OBB (6)	For specs see pages 341-343.
		Stem Options (Stem 1/2")		SK (Swivel Knuckle)	GI (Green IRR)	HID (5)	(HID Options 35W-175W)	
		ST		BGPC (Conical)	BI (Blue IRR)	MH (5) (9)	For specs see pages 341-343.	
		Specify length and canopy.		BGPD (Domed)	For all finishes see pages 344-348.	(Metal Halide)		
		HSC (Canopy)		(Bottom Glass Panel)		35/MH		
		SMC (Canopy)		For H-51022 - H-51025 only.		50/MH		
		Flush Mount Options		OPGL (Opal Globe)		70/MH		
		FHSC		CLGL (Clear Globe)		100/MH		
		FSMC		For H-51016 and H-51022 only.		150/MH		
		Arm Options		CLLS (Conical lens)		175/MH		
		B-1 HL-K		SFL (Smooth Flat Lens)		HPS (5) (9)		
		HL-A HL-U		For H-51025 only.		(High Pressure Sodium)		
		HL-H P-1		DPL (Drop Lens)		50/HPS		
		HL-C P-3		For specs and glass color see pages 321-344.		70/HPS		
		HL-D				100/HPS		
		For all arms and specs see pages 321-344.				150/HPS		
						LED		
						See LED specification sheet.		
							LED	
							See specifications for complete part number.	
								LED
								See specifications for complete part number.

H-51012 - 91 / 1/2" - 91 / CGU-CLR - 91 / 13/CFL - BCM - M

ORDER EXAMPLE
(USE THIS FORMAT TO PLACE ORDER)

Notes:

- H-51008 is available for 100W Max INC only and cannot use CGU, LCGU, WGU, LWGU, ARN, LARN or 3PTLCGU. Not available with LED.
- For interior finish of fixture refer to color chart on pages 344-348. H-51022 and H-51025 not available in copper or brass finish.
- Cord Mounting wattage not to exceed 100 for HID. Gray Mesh Cord not available for HID.
- (3PTLCGU) For 3" Post Top with LCGU, specify Glass Color CLR, FR, RIB, RD, BL, GRN, AM or AMC. 3PTLCGU available for H-51016, H-51022 and H-51025.
- Requires Globe Option (See pages 339-341 for Globe Options) CGU and WGU Max. Wattage 100W INC, 100W HID and 32W CFL. LWGU, LCGU, ARN and LARN Max Wattage 200W INC, 175W HID and 57W CFL.
- (RB) Remote Ballast not available for Fluorescent Lamping.
- (PLB) Post Line Ballast must specify 120V or 277V. (PLB) 50W MH requires a 3" dia. pole. (PLB) 70W and 100W MH require a 4" dia. pole. (PLB) 50W, 70W, 100W and 150W HPS require a 3" dia. pole.
- H-51008, H-51012 and H-51014 not available with onboard ballast. H-51016, H-51018, H-51022 and H-51025 available with 100W Max HID and 57W Max CFL onboard ballast. H-51022 and H-51025 available with 175W Max HID and 57W Max CFL onboard ballast.
- Socket Bases: INC and HID are medium base. CFL is GX24Q.

Cord-hung fixtures: suitable for dry location only.
Stem-hung fixtures: suitable for damp & dry location.
Gooseneck, post mount & wall bracket fixtures: suitable for wet, damp & dry location.