




**HI-LITE MFG.  
CO., INC.**

13450 Monte Vista Avenue  
Chino, California 91710  
Telephone: (909) 465-1999  
Fax: (909) 465-0907

Job Name: \_\_\_\_\_  
Type: \_\_\_\_\_  
Quantity: \_\_\_\_\_

Item Number	Height (A)	Width (B)	Projection (C)	Canopy Diameter (D)
H-53108-B	11"	8"	10 1/2"	5"
H-53112-B	14"	12"	14 3/4"	6"
H-53114-B	16"	14"	15 3/4"	6"

**For Wall  
Mount Only**

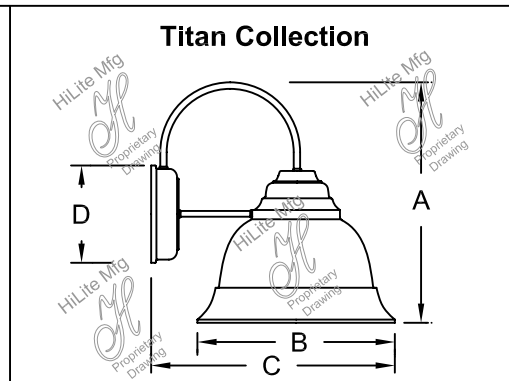

Fixture No.	Fixture Color	Accessories	Accessory Color	Wattage/Lamp Options	Ballast Options	Voltage
<b>H-53108-B</b> <b>H-53112-B</b> <b>H-53114-B</b>	(1) Standard (2) <b>91</b> (Black) <b>93</b> (White) <b>95</b> (Dk. Grn) <b>96</b> (Galv.) <b>BR47</b> (Rust) <b>BK01, GN20.</b>  Upgraded (2) Finishes <b>29, 66, 82, 92, 94, 97, 100, 103, 104, 105, 112, 113, 114, 117, 118, 119, 127, 128, 133, 134, 135, 136, 139, 140, 121, 122, 123, 124, 11, 01, 22, 25, 33, 77, 89, 24, 44, 48, 49.</b>  For finish specs see pages 344-348.	<b>CGU</b> (Cast Guard & Glass)  <b>LCGU</b> (Large Cast Guard & Glass)  <b>WGR</b> (Wire Guard & Glass)  <b>LWGU</b> (Large Wire Guard & Glass)  <b>ARN</b> (Acorn Globe)  <b>WGR</b> (Wire Guard)  <b>BGPC</b> (Conical) <b>BGPD</b> (Domed) (Bottom Glass Panel)  For H-53112-B only. <b>CLLS</b> (Conical Lens)  <b>SDL</b> (Smooth Domed Lens)  <b>SFL</b> (Smooth Flat Lens)  For specs and glass color see pages 321-344.	Standard <b>91</b> (Black) <b>93</b> (White) <b>95</b> (Dk. Grn) <b>96</b> (Galv.) <b>BR47</b> (Rust)  For BGPC and BGPD (Bottom Glass Panel Color) <b>HI</b> (Honey IRRl) <b>OP</b> (Opal) <b>CLR</b> (Clear) <b>FR</b> (Frost) <b>CLD</b> (Cloud) <b>GI</b> (Green IRRl) <b>BI</b> (Blue IRRl)  For all finishes see pages 344-348.	Incandescent (1) (5) (Fixture is standard 100W or 200W. Do not specify.)  CFL(3) (5) (Compact Fluorescent) <b>13/CFL</b> <b>18/CFL</b> <b>26/32/42/CFL</b> <b>26/CFL</b> <b>32/CFL</b> <b>42/CFL</b> <b>57/CFL</b>  <b>DMB</b> (Dimmable Ballast for CFL. Add to Part No.)  HID (3) (High Intensity Discharge)  MH (3) (5) (Metal Halide) <b>35/MH</b> <b>50/MH</b> <b>70/MH</b> <b>100/MH</b>  HPS (3) (5) (High Pressure Sodium) <b>50/HPS</b> <b>70/HPS</b> <b>100/HPS</b>  LED See LED specification sheet.	Ballast option not available for INC.  <b>RB</b> (4) (Remote)  OBB (Onboard)  <b>OBB</b> (Fluorescent Options 13W-57W)  For specs see pages 341-343.	Incandescent (Fixture is standard 120V. Do not specify.)  CFL <b>M</b> (Multi 120/277V)  HID RB and BCM <b>M</b> (Multi 120/208/240/277V)  LED See specifications for complete part number.

H-53112-B - 91 / CGU - 91 / 13/CFL - OBB - M

**ORDER EXAMPLE**

(USE THIS FORMAT TO PLACE ORDER)

Notes:	(3) Requires Globe Option. (See pages 339-341 for Globe Options) Max Wattages for CGU and WGU are 100W INC, 32W CFL and 100W HID. Max Wattages for LWGU, LCGU, ARN and LARN are 200W INC, 57W CFL and 175W HID.
(1) H-53108 is available for 100W Max INC only and not available with glass enclosure. Not available with LED.	(4) (RB) Remote ballast not available for Fluorescent Lamping.
(2) For interior finish of fixture refer to color chart on pages 344-348. For copper and aluminum finishes loop arm and straight arm will be painted copper or painted aluminum.	(5) Socket Bases: INC and HID are medium base. CFL is GX24Q. Suitable for wet location.