




**HI-LITE MFG.
CO., INC.**

13450 Monte Vista Avenue
Chino, California 91710
Telephone: (909) 465-1999
Fax: (909) 465-0907

Item Number	Height (A)	Width (B)
H-23660	14"	14"
H-23664	21"	19"
H-23668	26"	26"

Job Name: _____
Type: _____
Quantity: _____

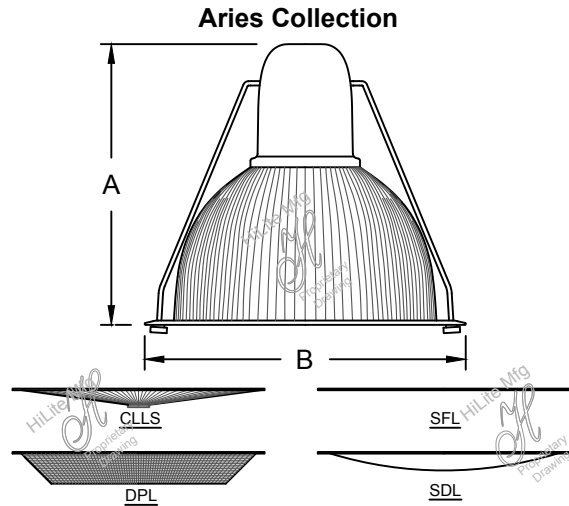

Fixture No.	Fixture Color	Lens Color	Mounting	Mounting Color	Optional Accessories	Accessory Color	Wattage/Lamp options	Ballast	Voltage
H-23660	Standard	RIB (Clear Ribbed)	Mounting Options	Standard	CLLS (4) (Conical Lens)	RIB (Clear Ribbed)	Incandescent (6) (Fixture is standard 200W. Do not specify.)	Ballast option not available for INC.	Incandescent (Fixture is standard 120V. Do not specify.)
H-23664	91 (Black)	FR (Frost)	1/2"	93 (White)	SDL (4) (Smooth Domed Lens)	CLR (Clear)	CFL (6) (Compact Fluorescent)	RB (5) (Remote)	CFL
H-23668	95 (Dk. Grn)	Colored (2) Lenses	3/4"	95 (Dk. Grn)	SFL (4) (Smooth Flat Lens)	FR (Frost)	13/CFL	BCM (Canopy Mount)	M (Multi 120/277V)
	96 (Galv.)	PK (Pink)	Cord Options (3) CB8 (8' Bk Cord) CW8 (8' Wht Cord) CG8 (8' Gray Mesh Cord)	96 (Galv.)	DPL (4) (Dropped Lens)	CLR (Clear)	18/CFL	For specs see pages 341-343.	HID
	BR47 (Rust)	RD (Red)	Custom Cord Options (3) CB (Black) CW (White) CG (Gray Mesh)	BR47 (Rust)	FX (Flexible tubing for cord mount fixture only.)	FR (Frost)	26/CFL		RB and BCM
	BK01, GN20.	LBL (Light Blue)	Stem Options (Stem 1/2") ST	For all finishes see pages 344-348.	For specs see pages 321-344.	RIB (Clear Ribbed)	32/CFL		M (Multi 120/208/240/277V)
	Upgraded Finishes (1) 29, 66, 82, 92, 94, 97, 100, 103, 104, 105, 112, 113, 114, 117, 118, 119, 127, 128, 133, 134, 135, 136, 98, 101, 102, 137, 139, 140, 121, 122, 123, 124, 11, 01, 22, 25, 33, 77, 89, 24, 44, 48, 49.	DBL (Dark Blue)	Specify length.				42/CFL		
		LGRN (Light Green)					57/CFL		
		DGRN (Dark Green)					DMB (Dimmable Ballast for CFL. Add to Part No.)		
		WH (White)					HID (High Intensity Discharge)		
	For finish specs see pages 344-348.	AM (Amber)					MH (6) (Metal Halide) 35/MH 50/MH 70/MH 100/MH 150/MH 175/MH		
			Flush Mount Options FHSC FSMC				HPS (6) (High Pressure Sodium) 50/HPS 70/HPS 100/HPS 150/HPS		
			For all specs see pages 321-344.				LED See LED specification sheet.	LED See specifications for complete part number.	LED See specifications for complete part number.

H-23660 - 91 - CLR / 1/2" - 91 / CLLS - RIB / 1-13/CFL - BCM - M

ORDER EXAMPLE
(USE THIS FORMAT TO PLACE ORDER)

Notes:

- (1) Arms will be painted to match copper and brass finishes.
- (2) Colored Lenses available for H-23660 only.
- (3) Cord Mounting wattage not to exceed 100 for HID. Gray Mesh Cord not available for HID.
- (4) CLLS available for H-23660, H-23664 and H-23668. SDL available for H-23660. SFL available for H-23660, H-23664 and H-23668. DPL available for H-23664 and H-23668.
- (5) (RB) Remote Ballast not available for Fluorescent Lamping.
- (6) Socket Bases: INC and HID are medium base. CFL is GX24Q.

Cord-hung fixtures: suitable for dry location only.
Stem-hung fixtures: suitable for damp & dry location.