




**HI-LITE MFG.
CO., INC.**

13450 Monte Vista Avenue
Chino, California 91710
Telephone: (909) 465-1999
Toll Free: (800) 465-0211
Fax: (909) 465-0907
www.hilitemfg.com

Job Name: _____
Type: _____
Quantity: _____

Orion Collection

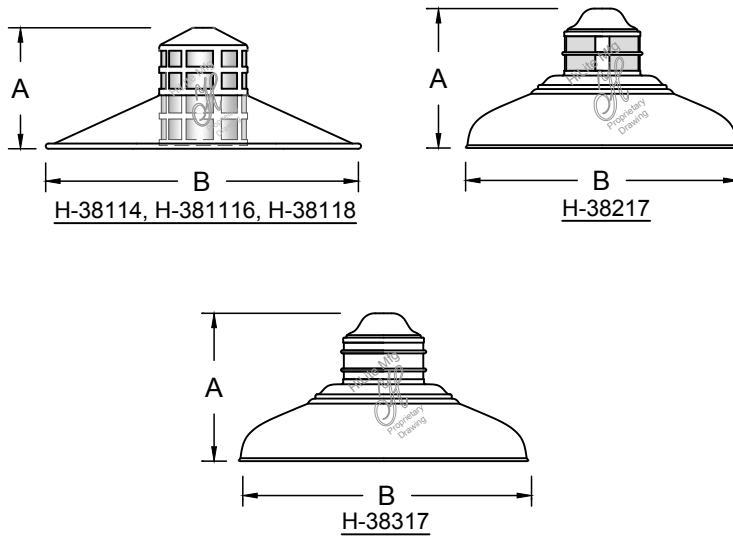

Item Number	Height (A)	Width (B)
H-38114	6 1/2"	14"
H-38116	6 1/2"	16"
H-38118	7 1/2"	18"
H-38217	10"	17"
H-38317	10"	17"

Fixture No.	Fixture Color	Lens Color	Mounting	Mounting Color	Optional Accessories	Accessory Color	Wattage/Lamp options	Ballast	Voltage
H-38114 H-38116 H-38118 H-38217 H-38317 ⁽¹⁾	Standard ⁽²⁾ 91 (Black) 93 (White) 95 (Dk. Grn) 96 (Galv.) BR47 (Rust) BK01, GN20. Upgraded ⁽²⁾ Finishes 29, 66, 82, 92, 94, 97, 100, 103, 104, 105, 112, 113, 114, 117, 118, 119, 127, 128, 133, 134, 135, 136, 139, 140, 33, 77, 89, 48, 49, 11. For finish specs see pages 344-348.	For H-38114, H-38116, H-38118 and H-38217 only. HI (Honey IRRI) OP (Opal) CLD (Cloud) FR (Frost) GI (Green IRRI) BI (Blue IRRI) SY (Seedy) CLR (Clear)	Mounting Options 1/2" 3/4" Cord Options ⁽³⁾ CB8 (8' Blk Cord) CW8 (8' Wht Cord) CG8 (8' Gray Mesh Cord) Custom Cord Options ⁽³⁾ CB (Black) CW (White) CG (Gray Mesh) Specify length. Stem Options (Stem 1/2") ST Specify length and canopy. HSC (Canopy) SMC (Canopy) Flush Mount Options FHSC FSMC Arm Options B-1 HL-K HL-A HL-U HL-H P-1 HL-C P-3 HL-D For all arms and specs see pages 321-344.	Standard 91 (Black) 93 (White) 95 (Dk. Grn) 96 (Galv.) BR47 (Rust) For all finishes see pages 344-348.	SK (Swivel knuckle) FX (Flexible tubing for cord mounted fixture only) For H-38114, H-38116 and H-38118 only. BGP (Bottom Glass Panel Style) For specs see pages 321-344. For H-38317 only. CGU (Cast guard and glass) LCGU (Large cast guard and glass) WGU (Wire guard and glass) LWGU (Large wire guard and glass) ARN (Acorn globe) For specs and glass color see pages 321-344.	Standard 91 (Black) 93 (White) 95 (Dk. Grn) 96 (Galv.) BR47 (Rust) For BGP (Bottom Glass Panel Color) HI (Honey IRRI) OP (Opal) CLR (Clear) FR (Frost) CLD (Cloud) GI (Green IRRI) For all finishes see pages 344-348.	Incandescent (4) (Fixture is standard 100W. Do not specify.) CFL (4) (Compact Fluorescent) 13/CFL 18/CFL 26/32/CFL 26/CFL 32/CFL DMB (Dimmable Ballast for CFL. Add to Part No.)	Ballast option not available for INC. BCM (Canopy Mount) For specs see pages 341-343.	Incandescent (Fixture is standard 120V. Do not specify.) CFL M (Multi 120/277V)

H-38114 - 91 - HI / 1/2" - 91 / SK - 91 / 13/CFL - BCM - M

ORDER EXAMPLE
(USE THIS FORMAT TO PLACE ORDER)

Notes:

- (1) H-38317 not available with Lens.
- (2) For interior finish of fixture refer to color chart on pages 344-348.
- (3) Cord Mounting wattage not to exceed 100 for HID. Gray Mesh Cord not available for HID.
- (4) Socket Bases: INC and HID are medium base. CFL is GX24Q.

Cord-hung fixtures: suitable for dry location only.
Stem-hung fixtures: suitable for damp & dry location.
Gooseneck, post mount & wall bracket fixtures: suitable for wet, damp & dry location.