




**HI-LITE MFG.  
CO., INC**

Job Name: \_\_\_\_\_  
 Type: \_\_\_\_\_  
 Quantity: \_\_\_\_\_

13450 Monte Vista Avenue  
 Chino, California 91710  
 Telephone: (909) 465-1999  
 Toll Free: (800) 465-0211

Item Number	Height (A)	Width (B)
H-7480	8"	6 1/2"
H-9600	10"	6 1/2"
H-9650	10"	4 1/2"
H-9675	9 1/2"	6 1/2"
H-36406	11"	6 1/2"

**Pendant Collection**

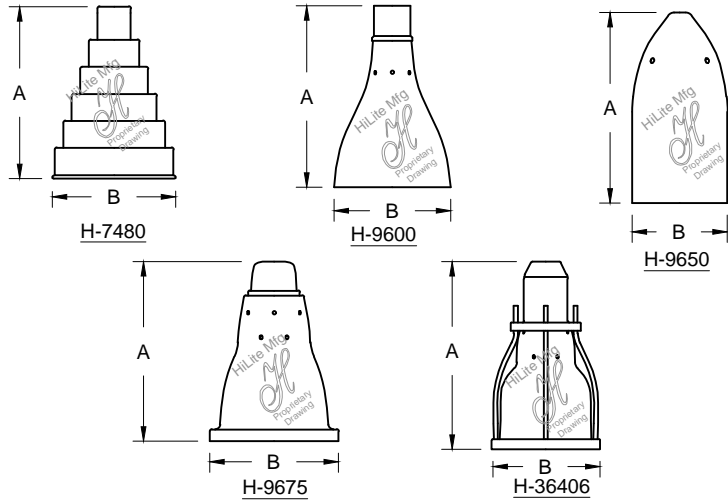

Fixture No.	Fixture Color	Mounting	Mounting Color	Optional Accessories	Wattage/Lamp Options	Voltage
<b>H-7480</b> <b>H-9600</b> <b>H-9650</b> <sup>(1)</sup> <b>H-9675</b> <b>H-36406</b>	Standard <sup>(2)</sup> <b>91</b> (Black) <b>93</b> (White) <b>95</b> (Dk. Grn) <b>96</b> (Galv.) <b>BR47</b> (Rust) <b>BK01, GN20</b> .  Upgraded <sup>(2)</sup> Finishes. <b>29, 66, 82, 92,</b> <b>94, 97, 100,</b> <b>103, 104, 105,</b> <b>112, 113, 114,</b> <b>117, 118, 119,</b> <b>127, 128, 133,</b> <b>134, 135, 136,</b> <b>98, 101, 102,</b> <b>137, 139, 140,</b> <b>121, 122, 123,</b> <b>124, 11, 01, 22,</b> <b>25, 33, 77, 89,</b> <b>24, 44, 48, 49,</b> <b>15, 16.</b>  For finish specs see pages 344-348.	Cord Options <b>CB8</b> (8' Blk Cord) <b>CW8</b> (8' Wht Cord) <b>CG8</b> (8' Gray Mesh Cord)  Custom Cord Options <b>CB</b> (Black) <b>CW</b> (White) <b>CG</b> (Gray Mesh) Specify length.  Stem Options <b>ST1/8</b> (1/8 IPS Stem) Specify length and canopy.  <b>STC-1</b> <b>STC-2</b> (Canopy)  <b>STC-1-SL</b> <b>STC-2-SL</b> (Stem canopy and swivel)  Flush Mount Options <b>FSTC-1</b> <b>FSTC-1-SL</b> <b>FSTC-2</b> <b>FSTC-2-SL</b>  For specs see pages 321-344.	Standard <b>91</b> (Black) <b>93</b> (White) <b>95</b> (Dk. Grn) <b>96</b> (Galv.) <b>BR47</b> (Rust)  For all finishes see pages 344-348.	<b>BTLF</b> (Bottom Lens Frost)  <b>BTLC</b> (Bottom Lens Clear)  <b>BTLH</b> (Bottom Lens Honey IRR1)  <b>BTLB</b> (Bottom Lens Blue IRR1)  <b>BTLG</b> (Bottom Lens Green IRR1)  <b>BTLO</b> (Bottom Lens Opal)	Incandescent <sup>(3)</sup> (Fixture is standard 100W. Do not specify)  CFL <sup>(3)</sup> (Compact Fluorescent) <b>13/CFL</b> <b>18/CFL</b> <b>26/CFL</b>  <b>DMB</b> (Dimmable Ballast for CFL. Add to Part No.)	Incandescent (Fixture is standard 120V. Do not specify.)  CFL <b>M</b> (Multi 120/277V)

↓                      ↓                      ↓                      ↓                      ↓

H-7480 - 
 91 / 
 CB8 - 
 91 / 
 BTLF / 
 - - 
 -

**ORDER EXAMPLE**  
 (USE THIS FORMAT TO PLACE ORDER)

**Notes:**

- (1) H-9650 not available with bottom lens.
  - (2) For interior finish of fixture refer to color chart on pages 344-348.
  - (3) Socket Bases: INC is medium base. CFL is GX24Q.
- Suitable for dry location only.