




**HI-LITE MFG.  
CO., INC.**  
13450 Monte Vista Avenue  
Chino, California 91710  
Telephone: (909) 465-1999  
Fax: (909) 465-0907

Job Name: \_\_\_\_\_  
Type: \_\_\_\_\_  
Quantity: \_\_\_\_\_


**For Wall  
Mount Only**

Item Number	Height (A)	Width (B)	Projection (C)	Canopy Dia. (D)
H-15106-B	8"	6"	8"	5 1/2"
H-15108-B	12"	8"	10"	6 1/4"
H-15110-B	13"	10"	13"	6 1/4"
H-15312-B	13-1/2"	12"	14 1/2"	6 1/4"
H-15314-B	15"	14"	16"	6 1/4"
H-15316-B	15"	16"	18"	6 1/4"


**Warehouse Shade  
Collection**



H-15108-B  
H-15110-B



H-15106-B

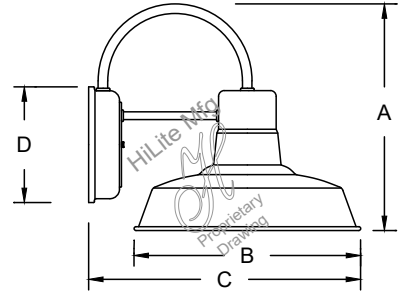

H-15312-B  
H-15314-B  
H-15316-B

Fixture No.	Fixture Color	Optional Accessories	Accessory Color	Wattage/Lamp Options	Ballast Options	Voltage
H-15106-B <sup>(1)(6)</sup>	Standard <sup>(2)</sup>	<b>CGU</b> (Cast guard & glass)	Standard <b>91</b> (Black) <b>93</b> (White) <b>95</b> (Dk. Grn) <b>96</b> (Galv.) <b>BR47</b> (Rust)	Incandescent (1) (5) (Fixture is standard 75W, 100W or 200W. Do not specify.)	Ballast option not available for INC.	Incandescent (Fixture is standard 120V. Do not specify.)
H-15108-B <sup>(1)(6)</sup>		<b>LCGU</b> (Large cast guard & glass)		CFL (3) (5) (Compact Fluorescent)	<b>RB</b> (4) (Remote)	CFL
H-15110-B <sup>(1)(6)</sup>		<b>WGU</b> (Wire guard & glass)	For all finishes see pages 344-348.	<b>13/CFL</b> <b>18/CFL</b> <b>26/32/42/CFL</b> <b>26/CFL</b> <b>32/CFL</b> <b>42/CFL</b> <b>57/CFL</b>	<b>OBB</b> (Onboard)	<b>M</b> (Multi 120/277V)
H-15312-B	Upgraded <sup>(2)</sup> Finishes	<b>LWGU</b> (Large wire guard & glass)		<b>DMB</b> (Dimmable Ballast for CFL. Add to Part No.)	<b>OBB</b> (Fluorescent Options 13W-57W)	HID
H-15314-B	<b>29, 66, 82, 92, 94, 97, 100, 103, 104, 105, 112, 113, 114, 117, 118, 119, 127, 128, 133, 134, 135, 136, 139, 140, 01, 11, 22, 25, 33, 77, 89, 24, 44, 48, 49.</b>	<b>ARN</b> (Acorn globe)		HID (3) (High Intensity Discharge)	For specs see pages 341-343.	<b>RB</b> and <b>BCM</b> <b>M</b> (Multi 120/208/240/277V)
H-15316-B	For finish specs see pages 344-348.	<b>LARN</b> (Large acorn globe)		MH (3) (5) (Metal Halide)		
		<b>WGR</b> (Wire guard)		HPS (3) (5) (High Pressure Sodium)		
		For specs and glass color see pages 321-344.		<b>50/HPS</b> <b>70/HPS</b> <b>100/HPS</b> <b>150/HPS</b>		
				LED See LED specification sheet.	LED See specifications for complete part number.	LED See specifications for complete part number.

H-15312-B - 91 / WGR - 91 / 13/CFL - OBB - M

**ORDER EXAMPLE**

(USE THIS FORMAT TO PLACE ORDER)

**Notes:**

- (1) H-15106-B available for 75W Max INC only and not available with glass enclosures.  
H-15108-B and H-15110-B available for 100W Max INC only and not available with glass enclosures.
- (2) For interior finish of fixture refer to color chart on pages 344-348. For copper and aluminum finishes loop arm and straight arm will be painted copper or painted aluminum.
- (3) Requires Globe Option (See pages 339-341 for Globe Options) CGU and WGU Max. Wattage 100W INC, 100W HID and 32W CFL. LWGU, LCGU, ARN and LARN Max Wattage 200W INC, 175W HID and 57W CFL.
- (4) (RB) Remote ballast not available for Fluorescent Lamping.
- (5) Socket Bases: INC and HID are medium base. CFL is GX24Q.
- (6) Not available in LED

Suitable for wet location.