




**HI-LITE MFG.
CO., INC.**
13450 Monte Vista Avenue
Chino, California 91710
Telephone: (909) 465-1999
Fax: (909) 465-0907

Job Name: _____
Type: _____
Quantity: _____

Item Number	Height (A)	Width (B)	Item Number	Height (A)	Width (B)
H-52012	12"	12"	H-52018	20"	18"
H-52014	14"	14"	H-52022	24"	22"
H-52016	16"	16"	H-52025	25"	25"

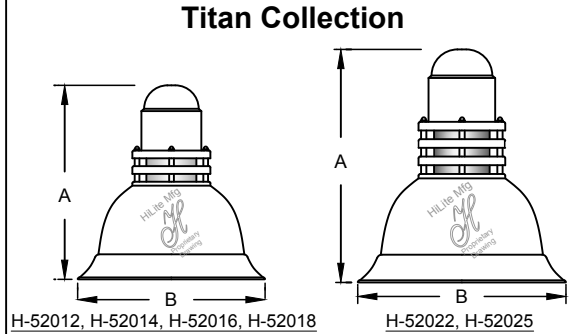

Fixture No.	Fixture Color	Lens Color	Mounting	Mounting Color	Optional Accessories	Accessory Color	Wattage/Lamp options	Ballast	Voltage
H-52012 ⁽¹⁾ H-52014 ⁽¹⁾ H-52016 ⁽¹⁾ H-52018 ⁽¹⁾ H-52022 ⁽¹⁾ H-52025 ⁽¹⁾	Standard ⁽²⁾ 91 (Black) 93 (White) 95 (Dk. Grn) 96 (Galv.) BR47 (Rust) BK01, GN20. Upgraded Finishes ⁽²⁾ 29, 66, 82, 92, 94, 97, 100, 103, 104, 105, 112, 113, 114, 117, 118, 119, 127, 128, 133, 134, 135, 136, 98, 101, 102, 137, 139, 140, 121, 122, 123, 124, 11, 01, 22, 25, 33, 77, 89, 24, 44, 48, 49. For finish specs see pages 344-348.	(For H-52012, H-52014, H-52016, H-52018, only) CLR (Clear) RIB (Clear Ribbed) FR (Frost) RD (Red) BL (Blue) GRN (Green) AM (Amber) AMC (Amber Crackle) (For H-52022, H-52025 only) CLR (Clear) FR (Frost)	Mounting Options 1/2" 3/4" Cord Options ⁽³⁾ CB8 (8' Blk Cord) CW8 (8' Wht Cord) CG8 (8' Gray Mesh Cord) Custom Cord Options ⁽³⁾ CB (Black) CW (White) CG (Gray Mesh) Specify length. Stem Options (Stem 1/2") ST Specify length and canopy. HSC (Canopy) HSC (Canopy) Flush Mount Options FHSC FSMC Arm Options B-1 HL-K HL-A HL-U HL-H P-1 HL-C P-3 HL-D For all arms and specs see pages 321-343.	Standard 91 (Black) 93 (White) 95 (Dk. Grn) 96 (Galv.) BR47 (Rust) For all finishes see pages 344-348. Specify length. Stem Options (Stem 1/2") ST Specify length and canopy. HSC (Canopy) HSC (Canopy) Flush Mount Options FHSC FSMC Arm Options B-1 HL-K HL-A HL-U HL-H P-1 HL-C P-3 HL-D For all arms and specs see pages 321-343.	WGR (Wire guard) SK (Swivel Knuckle) FX (Flex Tubing) BGPC (Conical) BGPD (Domed) (Bottom Glass Panel) CAL (Clear Acrylic Layer) BAL (Blue Acrylic Layer) RAL (Red Acrylic Layer) GNAL (Green Acrylic Layer) For H-52022 - H-52025 only. OPGL (Opal Globe) CLGL (Clear Globe) For H-52016 and H-52022 only. CLLS (Conical lens) SFL (Smooth Flat Lens) For H-52025 only. DPL (Drop Lens) For specs and glass color see pages 321-344.	Standard 91 (Black) 93 (White) 95 (Dk. Grn) 96 (Galv.) BR47 (Rust) For BGPC and BGPD (Bottom Glass Panel Color) HI (Honey IRR1) OP (Opal) CLR (Clear) FR (Frost) CLD (Cloud) GI (Green IRR1) BI (Blue IRR1) For all finishes see pages 344-348. GNAL (Green Acrylic Layer) For H-52022 - H-52025 only. OPGL (Opal Globe) CLGL (Clear Globe) For H-52016 and H-52022 only. CLLS (Conical lens) SFL (Smooth Flat Lens) For H-52025 only. DPL (Drop Lens) For specs and glass color see pages 321-344.	Incandescent (7) (Fixture is standard 100W or 200W. Do not specify.) CFL (7) (Compact Fluorescent) 13/CFL 18/CFL 26/32/42/CFL 26/CFL 32/CFL 42/CFL 57/CFL DMB (Dimmable Ballast for CFL. Add to Part No.) HID (High Intensity Discharge) MH (7) (Metal Halide) 35/MH 50/MH 70/MH 100/MH 150/MH 175/MH HPS (7) (High Pressure Sodium) 50/HPS 70/HPS 100/HPS 150/HPS LED See LED specification sheet.	Ballast option not available for INC. RB (4) (Remote) BCM (Canopy Mount) PLB (5) (Postline) OBB (Onboard) OBB ⁽⁶⁾ (Fluorescent Options 13W-57W) OBB ⁽⁶⁾ (HID Options 35W-175W) For specs see pages 341-343.	Incandescent (Fixture is standard 120V. Do not specify.) CFL M (Multi 120/277V) HID RB and BCM M (Multi 120/208/240/277V) PLB 1 (120V) 2 (277V) LED See specifications for complete part number.

H-52012 - 91 - CLR / 1/2" - 91 / SK - 91 / 13/CFL - BCM - M

ORDER EXAMPLE
(USE THIS FORMAT TO PLACE ORDER)

- Notes:**
- H-52012 is available for 100W Max INC, 32W Max CFL and 100W max HID. H-52014, H-52016, H-52018, H-52022 and H-52025 are available for 200W max INC, 57 Watt Max CFL and 175W Max HID. H-52012, H-52014, H-52016 and H-52018 have a complete globe enclosure. H-52022 and H-52025 have an acrylic side globe only.
 - For interior finish of fixture refer to color chart on pages 344-348. H-52022 and H-52025 not available in copper or brass finish.
 - Cord Mounting wattage not to exceed 100 for HID. Gray Mesh Cord not available for HID.
 - (RB) Remote Ballast not available for Fluorescent Lamping.
 - (PLB) Post Line Ballast must specify 120V or 277V. (PLB) 50W MH requires a 3" dia. pole. (PLB) 70W and 100W MH require a 4" dia. pole. (PLB) 50W, 70W, 100W and 150W HPS require a 3" dia. pole.
 - H-52012 and H-52014 not available with onboard ballast. H-52016 and H-52018 and available with 100W Max HID and 57W Max CFL onboard ballast. H-52022 and H-52025 available with 175W Max HID and 57W Max CFL onboard ballast.
 - Socket Bases: INC and HID are medium base. CFL is GX24Q.
- Cord-hung fixtures:** suitable for dry location only.
Stem-hung fixtures: suitable for damp & dry location.
Gooseneck, post mount & wall bracket fixtures: suitable for wet, damp & dry location.