




**HI-LITE MFG.
CO., INC.**
13450 Monte Vista Avenue
Chino, California 91710
Telephone: (909) 465-1999
Fax: (909) 465-0907

Job Name: _____
Type: _____
Quantity: _____

Item Number	Height (A)	Width (B)
H-16510	11"	10"
H-16512	10 3/4"	12"
H-16514	14"	14"
H-16516	16-1/2"	16"
H-16518	18"	19 1/2"
H-16524	20 1/4"	24"

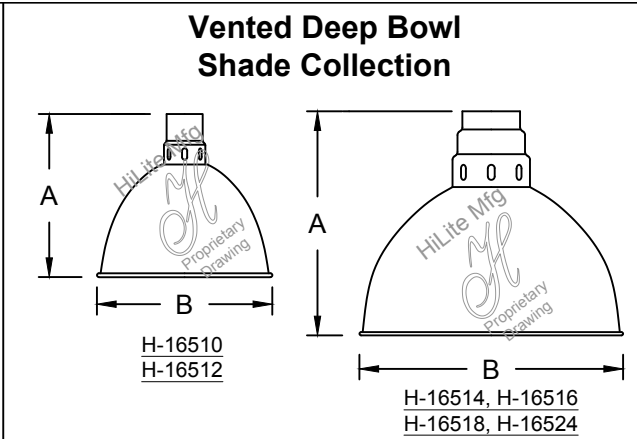

Fixture No.	Fixture Color	Mounting	Mounting Color	Optional Accessories	Accessory Color	Wattage/Lamp options	Ballast	Voltage
H-16510	Standard (1) 91 (Black)	Mounting Options 1/2"	Standard 91 (Black)	CGU (Cast guard & glass)	Standard 91 (Black)	Incandescent (6) (Fixture is standard 200W. Do not specify.)	Ballast option not available for INC.	Incandescent (Fixture is standard 120V. Do not specify.)
H-16512	93 (White)	3/4"	93 (White)	LCGU (Large cast guard & glass)	93 (White)	CFL (6) (Compact Fluorescent)	RB (4) (Remote)	CFL M (Multi 120/277V)
H-16514	95 (Dk. Grn)	Cord Options(2) CB8 (8' Blk Cord)	95 (Dk. Grn)	WGU (Wire guard & glass)	95 (Dk. Grn)	13/CFL	BCM (Canopy Mount)	HID
H-16516	96 (Galv.)	CW8 (8' Wht Cord)	96 (Galv.)	LWGU (Large wire guard & glass)	96 (Galv.)	26/32/42/CFL	PLB (5) (Postline)	RB and BCM
H-16518	BR47 (Rust)	CG8 (8' Gray Mesh Cord)	BR47 (Rust)	ARN (Acorn globe)	BR47 (Rust)	32/CFL	For specs see pages 341-343.	M (Multi 120/208/240/277V)
H-16524	BK01, GN20.	Custom Cord Options(2) CB (Black)	For all finishes see pages 344-348.	LARN (Large acorn globe)	For all finishes see pages 344-348.	42/CFL		PLB 1 (120V) 2 (277V)
	Upgraded (1) Finishes. 29, 66, 82, 92, 94, 97, 100, 103, 104, 105, 112, 113, 114, 117, 118, 119, 127, 128, 133, 134, 135, 136, 98, 101, 102, 137, 139, 140, 121, 122, 123, 124, 11, 01, 22, 25, 33, 77, 89, 24, 44, 48, 49, 15, 16.	CG (Gray Mesh) Specify length.		WGR (Wire guard)		57/CFL		
	For finish specs see pages 344-348.	Stem Options (Stem 1/2") ST Specify length and canopy. HSC (Canopy) SMC (Canopy)		SK (Swivel knuckle)		DMB (Dimmable Ballast for CFL. Add to Part No.)		
		Flush Mount Options FHSC FSMC		LARN (Large acorn globe)		HID (High Intensity Discharge)		
		Arm Options B-1 HL-K HL-A HL-U HL-H P-1 HL-C P-3 HL-D		FX (Flexible tubing for cord mounted fixtures only)		MH (6) (Metal Halide) 35/MH 50/MH 70/MH 100/MH 150/MH 175/MH		
		For all arms and specs see pages 321-344.		For specs and glass color see pages 321-344.		HPS (6) (High Pressure Sodium) 50/HPS 70/HPS 100/HPS 150/HPS		
						LED See LED specification sheet.	LED See specifications for complete part number.	LED See specifications for complete part number.

H-16510 - 91 / 1/2" - 91 / CGU-CLR - 91 / 13/CFL - BCM - M

ORDER EXAMPLE
(USE THIS FORMAT TO PLACE ORDER)

- Notes:**
- (1) For interior finish of fixture refer to color chart on pages 344-348. H-16516, H-16518 and H-16524 not available in copper or brass finish.
 - (2) Cord Mounting wattage not to exceed 100 for HID. Gray Mesh Cord not available for HID.
 - (3) Requires Globe Option. (See pages 339-341 for Globe Options)
Max Wattages for CGU and WGU are 100W INC, 32W CFL and 100W HID.
Max Wattages for LWGU, LCGU, ARN and LARN are 200W INC, 57W CFL and 175W HID.
 - (4) (RB) Remote Ballast not available for Fluorescent Lamping.
 - (5) (PLB) Post Line Ballast must specify 120V or 277V.
(PLB) 50W MH requires a 3" dia. pole.
(PLB) 70W and 100W MH require a 4" dia. pole.
(PLB) 50W, 70W, 100W and 150W HPS require a 3" dia. pole.
 - (6) Socket Bases: INC and HID are medium base. CFL is GX24Q.
- Cord-hung fixtures:** suitable for dry location only.
Stem-hung fixtures: suitable for damp & dry location.
Gooseneck, post mount & wall bracket fixtures: suitable for wet, damp & dry location.