




**HI-LITE MFG.
CO., INC.**

13450 Monte Vista Avenue
Chino, California 91710
Telephone: (909) 465-1999
Toll Free: (800) 465-0211


Job Name: _____
Type: _____
Quantity: _____

Item Number	Height (A)	Width (B)
H-MNCGU-10-RG-1	9"	10"
H-CGU-10-RG-1	10"	10"
H-LCGU-14-RG-1	12"	13"
H-MNCGU-10-RG	9"	10"
H-CGU-10-RG	10"	10"
H-LCGU-14-RG	12"	13"

Saucer Jelly Jar Collection

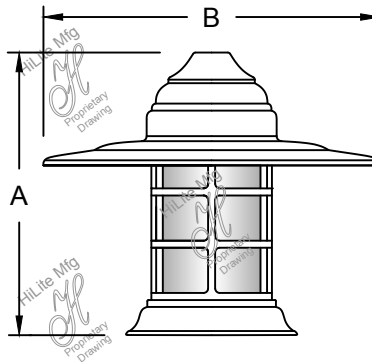

H-MNCGU-10-RG-1
H-CGU-10-RG-1
H-LCGU-14-RG-1

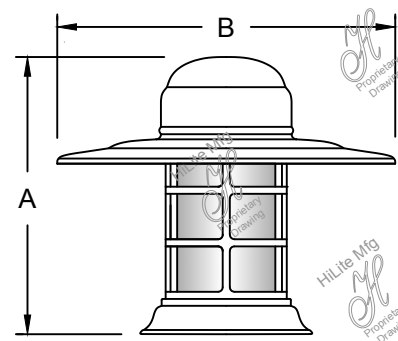

H-MNCGU-10-RG
H-CGU-10-RG
H-LCGU-14-RG

Fixture No.	Fixture Color	Glass Color	Mounting	Mounting Color	Optional Accessories	Accessory Color	Wattage/Lamp options	Ballast	Voltage
H-MNCGU-10-RG-1 ⁽¹⁾ H-CGU-10-RG-1 ⁽¹⁾ H-LCGU-14-RG-1 ⁽¹⁾ H-MNCGU-10-RG ⁽¹⁾ H-CGU-10-RG ⁽¹⁾ H-LCGU-14-RG ⁽¹⁾	Standard 91 (Black) 93 (White) 95 (Dk. Grn) 96 (Galv.) BR47 (Rust) BK01, GN20. Upgraded ⁽²⁾ Finishes. 29, 66, 82, 92, 94, 97, 100, 103, 104, 105, 112, 113, 114, 117, 118, 119, 127, 128, 133, 134, 135, 136, 98, 101, 102, 137, 139, 140, 121, 122, 123, 124, 11, 01, 22, 25, 33, 77, 89, 24, 44, 48, 49. For finish specs see pages 344-348.	CLR (Clear) RIB (Clear Ribbed) FR (Frost) RD (Red) BL (Blue) GRN (Green) AM (Amber) AMC (Amber Crackle)	Mounting Options 1/2" 3/4" Cord Options ⁽³⁾ CB8 (8' Blk Cord) CW8 (8' Wht Cord) CG8 (8' Gray Mesh Cord) Custom Cord Options ⁽³⁾ CB (Black) CW (White) CG (Gray Mesh) Specify length. Stem Options (Stem 1/2") ST Specify length and canopy. HSC (Canopy) SMC (Canopy) Flush Mount Options FHSC FSMC Arm Options B-1 HL-K HL-A HL-U HL-H P-1 HL-C P-3 HL-D For all arms and specs see pages 321-344.	Standard 91 (Black) 93 (White) 95 (Dk. Grn) 96 (Galv.) BR47 (Rust) For all finishes see pages 344-348.	SK (Swivel knuckle) FX (Flexible tubing for cord mounted fixture only) For specs see pages 321-344.	Standard 91 (Black) 93 (White) 95 (Dk. Grn) 96 (Galv.) BR47 (Rust) For all finishes see pages 344-348.	Incandescent ^{(1) (6)} (Fixture is standard 100W or 200W. Do not specify.) CFL (6) (Compact Fluorescent) 13/CFL 18/CFL 26/32/42/CFL 26/CFL 32/CFL 42/CFL 57/CFL DMB (Dimmable Ballast for CFL. Add to Part No.) HID (High Intensity Discharge) MH (6) (Metal Halide) 35/MH 50/MH 70/MH 100/MH 150/MH 175/MH HPS (6) (High Pressure Sodium) 50/HPS 70/HPS 100/HPS 150/HPS	Ballast option not available for INC. RB (4) (Remote) BCM (Canopy Mount) PLB (5) (Postline) For specs see pages 341-343.	Incandescent (Fixture is standard 120V. Do not specify.) CFL M (Multi 120/277V) HID RB and BCM M (Multi 120/208/ 240/277V) PLB 1 (120V) 2 (277V)
							LED See LED specification sheet.	LED See specifications for complete part number.	LED See specifications for complete part number.

H-MNCGU-10-RG-1 - 91 - CLR / CB8 - 91 / SK - 91 / 35/MH - RB - M

ORDER EXAMPLE

(USE THIS FORMAT TO PLACE ORDER)

Notes:

- (1) H-MNCGU-10-RG-1, H-CGU-10-RG-1, H-MNCGU-10-RG and H-CGU-10-RG available for 100W Max INC, 32W Max CFL and 100W Max HID. H-MNCGU-10-RG-1 and H-MNCGU-10-RG not available with LED. H-LCGU-14-RG-1 and H-LCGU-14-RG available for 200W Max INC, 57W Max CFL and 175W Max HID. Above fixtures available with WGU wireguard.
- (2) Casting will be painted to match copper and brass finishes..
- (3) Cord Mounting wattage not to exceed 100 for HID. Gray Mesh Cord not available for HID.

- (4) (RB) Remote Ballast is not available for Fluorescent Lamping.
- (5) (PLB) Post Line Ballast must specify 120V or 277V. (PLB) 50W MH requires a 3" dia. pole. (PLB) 70W and 100W MH require a 4" dia. pole. (PLB) 50W, 70W, 100W and 150W HPS require a 3" dia. pole.
- (6) Socket Bases: INC and HID are medium base. CFL is GX24Q.

Cord-hung fixtures: suitable for dry location only.
Stem-hung fixtures: suitable for damp & dry location.
Gooseneck, post mount & wall bracket fixtures: suitable for wet, damp & dry location.