




**HI-LITE MFG.
CO., INC.**

13450 Monte Vista Avenue
Chino, California 91710
Telephone: (909) 465-1999
Fax: (909) 465-0907

Job Name: _____
Type: _____
Quantity: _____

Item Number	Height (A)	Width (B)
H-60108	10"	8"
H-60110	10"	10"
H-60112	12"	12"
H-60114	12"	14"
H-60116	12"	16"

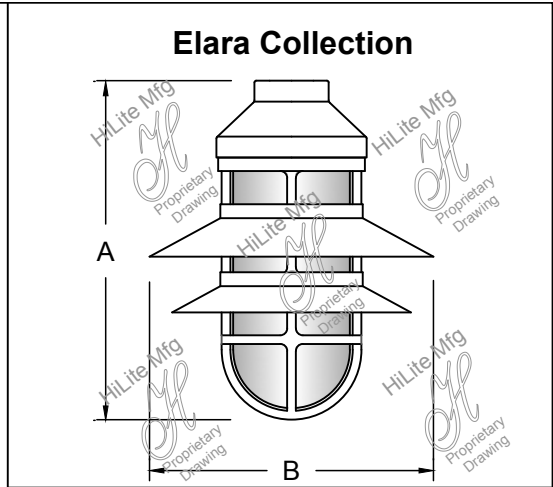

Fixture No.	Fixture Color	Glass Color	Mounting	Mounting Color	Optional Accessories	Accessory Color	Wattage/Lamp options	Ballast	Voltage
H-60108 ⁽¹⁾	Standard	CLR (Clear)	Mounting Options	Standard	SK (Swivel knuckle)	Standard	Incandescent (5) (Fixture is standard 100W or 200W. Do not specify.)	Ballast option not available for INC.	Incandescent (Fixture is standard 120V. Do not specify.)
H-60110 ⁽¹⁾	91 (Black)	RIB (Clear Ribbed)	1/2"	91 (Black)	FX (Flexible tubing for cord mounted fixture only)	91 (Black)		RB ⁽³⁾ (Remote)	CFL
H-60112 ⁽¹⁾	93 (White)	FR (Frost)	3/4"	93 (White)		93 (White)	CFL (5) (Compact Fluorescent)	BCM (Canopy Mount)	M (Multi 120/277V)
H-60114 ⁽¹⁾	95 (Dk. Grn)	RD (Red)	Cord Options ⁽²⁾	95 (Dk. Grn)	For all finishes see pages 344-348.	95 (Dk. Grn)	13/CFL	PLB ⁽⁴⁾ (Postline)	HID
H-60116 ⁽¹⁾	96 (Galv.)	BL (Blue)	CB8 (8' Blk Cord) CW8 (8' Wht Cord) CG8 (8' Gray Mesh Cord)	96 (Galv.) BR47 (Rust)		96 (Galv.) BR47 (Rust)	18/CFL 26/32/42/CFL 26/CFL 32/CFL 42/CFL 57/CFL	For specs see pages 341-343.	M (Multi 120/208/240/277V)
	Upgraded Finishes: 29, 66, 82, 92, 94, 97, 100, 103, 104, 105, 112, 113, 114, 117, 118, 119, 127, 128, 133, 134, 135, 136, 98, 101, 102, 137, 139, 140, 121, 122, 123, 124, 11, 01, 22, 25, 33, 77, 89, 24, 44, 48, 49.	GRN (Green)	Custom Cord Options ⁽²⁾				DMB (Dimmable Ballast for CFL. Add to Part No.)		PLB 1 (120V) 2 (277V)
	For finish specs see pages 344-348.	AM (Amber)	Stem Options (Stem 1/2")				HID (High Intensity Discharge)		
		AMC (Amber Crackle)	ST Specify length and canopy. HSC (Canopy) SMC (Canopy)				MH (5) (Metal Halide) 35/MH 50/MH 70/MH 100/MH 150/MH 175/MH		
			Flush Mount Options FHSC FSMC				HPS (5) (High Pressure Sodium) 50/HPS 70/HPS 100/HPS 150/HPS		
			Arm Options B-1 HL-K HL-A HL-U HL-H P-1 HL-C P-3 HL-D						
			For all arms and specs see pages 321-344.						
							LED See LED specification sheet.	LED See specifications for complete part number.	LED See specifications for complete part number.

H-60108 - 91 - CLR / 1/2" - 91 / SK - 91 / 35/MH - RB - M

ORDER EXAMPLE
(USE THIS FORMAT TO PLACE ORDER)

Notes:

- (1) H-60108 and H-60110 available for 100W Max INC, 32W Max CFL and 100W Max HID.
H-60112, H-60114 and H-60116 available for 200W Max INC, 57W Max CFL and 175W Max HID.
- (2) Cord Mounting wattage not to exceed 100 for HID.
Gray Mesh Cord not available for HID.
- (3) (RB) Remote Ballast is not available for Fluorescent Lamping.
- (4) (PLB) Post Line Ballast must specify 120V or 277V.
(PLB) 50W MH requires a 3" dia. pole.
(PLB) 70W and 100W MH require a 4" dia. pole.
(PLB) 50W, 70W, 100W and 150W HPS require a 3" dia. pole.
- (5) Socket Bases: INC and HID are medium base. CFL is GX24Q.
Cord-hung fixtures: suitable for dry location only.
Stem-hung fixtures: suitable for damp & dry location.
Gooseneck, post mount & wall bracket fixtures: suitable for wet, damp & dry location.