




**HI-LITE MFG.
CO., INC.**

13450 Monte Vista Avenue
Chino, California 91710
Telephone: (909) 465-1999

Job Name: _____
Type: _____
Quantity: _____

Item Number	Height (A)	Width (B)	Fitter
H-93708	8 1/2"	8 1/2"	4"
H-93710	8 1/4"	10"	4"
H-93712	10"	12"	6"
H-93714	11"	14"	6"
H-93716	12"	16"	6"
H-93718	13 3/4"	18"	6"

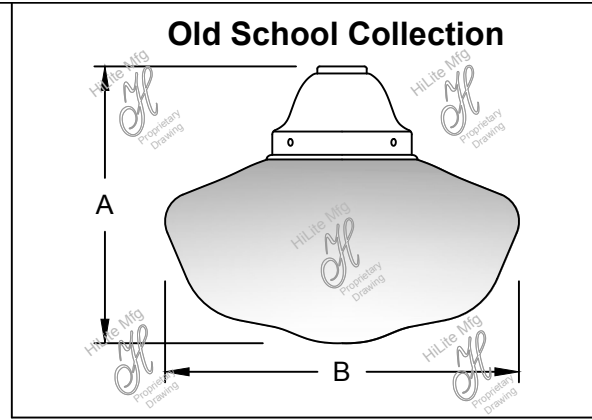

Fixture No.	Fixture Color	Glass Color	Mounting	Mounting Color	Wattage/Lamp options	Ballast	Voltage
H-93708 ⁽¹⁾	Standard	OP (Opal)	Cord Options ⁽²⁾ CB8 (8' Bk Cord) CW8 (8' Wht Cord) CG8 (8' Gray Mesh Cord)	Standard 91 (Black) 93 (White) 95 (Dk. Grn) 96 (Galv.) BR47 (Rust)	Incandescent (1)(3) (Fixture is standard 100W or 200W. Do not specify.) CFL (1)(3) (Compact Fluorescent) 13/CFL 18/CFL 26/32/42/CFL 26/CFL 32/CFL 42/CFL DMB (Dimmable Ballast for CFL. Add to Part No.) HID (1)(3) (High Intensity Discharge) MH (1)(3) (Metal Halide) 35/MH 50/MH 70/MH 100/MH 150/MH 175/MH HPS (1)(3) (High Pressure Sodium) 50/HPS 70/HPS 100/HPS 150/HPS	Ballast option not available for INC. BCM (Canopy Mount) RB (4) (Remote)	Incandescent (Fixture is standard 120V. Do not specify.) CFL M (Multi 120/277V) HID RB and BCM M (Multi 120/208/240/277V)
H-93710 ⁽¹⁾	91 (Black)		Custom Cord Options ⁽²⁾ CB (Black) CW (White) CG (Gray Mesh) Specify length. Chain Mount Options D (3' chain and 7' wire) Custom Chain Options D Specify chain and wire length. Stem Options ST1/8 or ST1/4 (1/8 or 1/4 IPS Stem) Specify length and canopy. STC-2 (Canopy) STC-2-SL (Stem canopy and swivel) Stem Options (Stem 1/2") ST Specify length and canopy. HSC (Canopy) SMC (Canopy) Flush Mount Options FSTC-2 FSTC-2-SL For specs see pages 321-344.	For all finishes see pages 344-348.	LED See LED specification sheet.	LED See specifications for complete part number.	LED See specifications for complete part number.
H-93712 ⁽¹⁾	93 (White)						
H-93714 ⁽¹⁾	95 (Dk. Grn)						
H-93716 ⁽¹⁾	96 (Galv.)						
H-93718 ⁽¹⁾	BR47 (Rust) BK01, GN20.						
	Upgraded Finishes. 29, 66, 82, 92, 94, 97, 100, 103, 104, 105, 112, 113, 114, 117, 118, 119, 127, 128, 133, 134, 135, 136, 98, 101, 102, 137, 139, 140, 121, 122, 123, 124, 11, 01, 22, 25, 33, 77, 89, 24, 44, 48, 49.						
	For finish specs see pages 344-348.						

H-93708 - 91 - OP / CB8 - 91 / 13/CFL - BCM - M

ORDER EXAMPLE

(USE THIS FORMAT TO PLACE ORDER)

Notes:

- (1) H-93708 and H-93710 available for 100W Max INC, 1-26W Max CFL.
H-93712 available for 100W Max INC, 1-32W Max CFL.
H-93714 available for 150W Max INC, 1-42W or 2-26 Max CFL.
H-93716 available for 200W Max INC, 1-42W or 2-32W Max CFL and 100W Max HID.
H-93718 available for 200W Max INC, 2-42W Max CFL and 150W Max HID. Not available with cord mounting.

- (2) Cord mounting wattage not to exceed 100 for HID. Gray Mesh Cord not available for HID.
- (3) Socket Bases: INC and HID are medium base. CFL is GX24Q.
- (4) (RB) Remote Ballast not available for Fluorescent Lamping.

Suitable for dry location.
Suitable for damp locations only when used with 1/2" stem.