




Job Name: _____
 Type: _____
 Quantity: _____

**HI-LITE MFG.
 CO., INC.**
 13450 Monte Vista Avenue
 Chino, California 91710
 Telephone: (909) 465-1999
 Fax: (909) 465-0907

Item Number	Height (A)	Width (B)
H-506	12"	13"
H-1344	13"	10"
H-1320	11"	16"
H-7370	9"	18"
H-7375	10"	9"

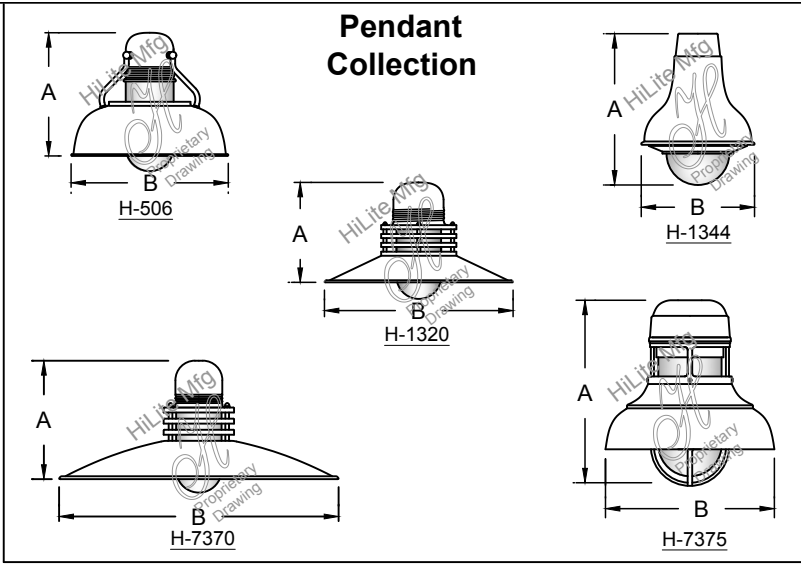

Fixture No.	Fixture Color	Glass Color	Mounting	Mounting Color	Optional Accessories	Accessory Color	Wattage/Lamp options	Ballast	Voltage
H-506 (1)	Standard (2) 91 (Black) 93 (White)	CLR (Clear)	Mounting Options 1/2" 3/4"	Standard 91 (Black) 93 (White) 95 (Dk. Grn) 96 (Galv.) BR47 (Rust)	SK (Swivel knuckle) FX (Flexible tubing for cord mounted fixture only)	Standard 91 (Black) 93 (White) 95 (Dk. Grn) 96 (Galv.) BR47 (Rust)	Incandescent (1) (6) (Fixture is standard 100W or 200W. Do not specify) CFL (6) (Compact Fluorescent) 13/CFL 18/CFL 26/32/42/CFL 26/CFL 32/CFL 42/CFL 57/CFL DMB (Dimmable Ballast for CFL. Add to Part No.) HID (High Intensity Discharge) MH (6) (Metal Halide) 35/MH 50/MH 70/MH 100/MH 150/MH 175/MH HPS (6) (High Pressure Sodium) 50/HPS 70/HPS 100/HPS 150/HPS	Ballast option not available for INC. RB (4) (Remote) BCM (Canopy Mount) PLB (5) (Postline ballast) For specs see pages 340-341.	Incandescent 1 (120V) CFL M (Multi 120/277V) HID RB and BCM M (Multi 120/208/240/277V) PLB 1 (120V) 2 (277V)
H-1344 (1)	95 (Dk. Grn) 96 (Galv.) BR47 (Rust) BR47 (Rust)	RIB (Clear Ribbed)	Cord Options (3) CB8 (8' Blk Cord) CW8 (8' Wht Cord) CG8 (8' Gray Mesh Cord)	For all finishes see pages 343-346.	For H-1320 and H-7370 only CAL (Clear Acrylic Layer) BAL (Blue Acrylic Layer) RAL (Red Acrylic Layer) GNAL (Green Acrylic Layer)	For all finishes see pages 343-346.			
H-1320 (1)	Upgraded Finishes. 29, 66, 82, 92, 94, 97, 100, 103, 104, 105, 112, 113, 114, 117, 118, 119, 127, 128, 133, 134, 135, 136, 139, 140, 98, 101, 102, 137, 121, 122, 123, 124, 11, 01, 22, 25, 33, 77, 89, 24, 44, 48, 49, 15, 16.	FR (Frost) RD (Red) BL (Blue) GRN (Green) AM (Amber) AMC (Amber Crackle)	Custom Cord Options (3) CB (Black) CW (White) CG (Gray Mesh) Specify length. Stem Options (Stem 1/2") ST Specify length and canopy HSC (Canopy) SMC (Canopy) Flush Mount Options FHSC FSMC Arm Options B-1 HL-K HL-A HL-U HL-H P-1 HL-C P-3 HL-D For all arms and specs see pages 319-342.		For specs see pages 334-342.				
H-7370 (1)	For finish specs see pages 344-348.								
H-7375 (1)									

H-506 - 91 - CLR / 1/2" - 91 / SK - 91 / 13/CFL - BCM - M

ORDER EXAMPLE
 (USE THIS FORMAT TO PLACE ORDER)

- Notes:**
- (1) H-7370 and H-7375 available for 100W Max INC, 32W Max CFL and 100W Max HID. H-506, H-1344 and H-1320 available for 200W Max INC, 57W Max CFL and 175W Max HID
 - (2) For interior finish of fixture refer to color chart on pages 343-346.
 - (3) Cord Mounting wattage not to exceed 100 for HID. Gray Mesh Cord not available for HID.
 - (4) (RB) Remote Ballast not available for Fluorescent Lamping.
 - (5) (PLB) Post Line Ballast must specify 120V or 277V. (PLB) 50W MH requires a 3" dia. pole. (PLB) 70W and 100W MH require a 4" dia. pole. (PLB) 50W, 70W, 100W and 150W HPS require a 3" dia. pole.
 - (6) Socket Bases: INC and HID are medium base. CFL is GX24Q.
- Cord-hung fixtures:** suitable for dry location only.
Stem-hung fixtures: suitable for damp & dry location.
Gooseneck, post mount & wall bracket fixtures: suitable for wet, damp & dry location.