




**HI-LITE MFG.
CO., INC.**
13450 Monte Vista Avenue
Chino, California 91710
Telephone: (909) 465-1999
Fax: (909) 465-0907

Job Name: _____
Type: _____
Quantity: _____

Cast Guard Warehouse Shade Collection

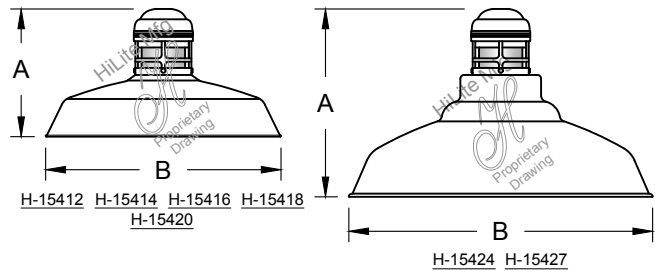

Item Number	Height (A)	Width (B)
H-15412	8"	12"
H-15414	9 1/2"	14"
H-15416	10-1/2"	16"
H-15418	10 3/4"	18"
H-15420	11"	20"
H-15424	16"	24"
H-15427	18"	27"

Fixture No.	Fixture Color	Glass Color	Mounting	Mounting Color	Optional Accessories	Accessory Color	Wattage/Lamp options	Ballast	Voltage
H-15412 ⁽¹⁾	Standard ⁽²⁾	CLR (Clear)	Mounting Options	Standard	SK (Swivel knuckle)	Standard	Incandescent ⁽⁶⁾	Ballast option not available for INC.	Incandescent (Fixture is standard 120V. Do not specify.)
H-15414 ⁽¹⁾	91 (Black)	RIB (Clear Ribbed)	1/2"	91 (Black)	FX (Flexible tubing for cord mounted fixture only)	91 (Black)	(Fixture is standard 100W or 200W. Do not specify.)	RB ⁽⁴⁾ (Remote)	CFL M (Multi 120/277V)
H-15416 ⁽¹⁾	93 (White)	FR (Frost)	3/4"	93 (White)	For all finishes see pages 344-348.	93 (White)	CFL ⁽⁶⁾ (Compact Fluorescent)	BCM (Canopy Mount)	HID RB and BCM M (Multi 120/208/240/277V)
H-15418 ⁽¹⁾	95 (Dk. Grn)	RD (Red)	Cord Options ⁽³⁾	95 (Dk. Grn)	For specs see pages 321-344.	95 (Dk. Grn)	13/CFL	PLB ⁽⁵⁾ (Postline)	PLB 1 (120V) 2 (277V)
H-15420 ⁽¹⁾	96 (Galv.)	BL (Blue)	CB8 (8' Blk Cord) CW8 (8' Wht Cord) CG8 (8' Gray Mesh Cord)	96 (Galv.)		96 (Galv.)	18/CFL	For specs see pages 341-343.	
H-15424 ⁽¹⁾	BR47 (Rust)	GRN (Green)	Custom Cord Options ⁽³⁾	BR47 (Rust)		BR47 (Rust)	26/32/42/CFL		
H-15427 ⁽¹⁾	BK01, GN20.	AM (Amber)	CB (Black) CW (White) CG (Gray Mesh) Specify length.	For all finishes see pages 344-348.			26/CFL		
	Upgraded ⁽²⁾ Finishes. 29, 66, 82, 92, 94, 97, 100, 103, 104, 105, 112, 113, 114, 117, 118, 119, 127, 128, 133, 134, 135, 136, 98, 101, 102, 137, 139, 140, 121, 122, 123, 124, 11, 01, 22, 25, 33, 77, 89, 24, 44, 48, 49.	AMC (Amber Crackle)	Stem Options (Stem 1/2") ____ ST Specify length and canopy. HSC (Canopy) SMC (Canopy)				42/CFL		
	For finish specs see pages 344-348.		Flush Mount Options FHSC FSMC				57/CFL		
			Arm Options B-1 HL-K HL-A HL-U HL-H P-1 HL-C P-3 HL-D				DIMB (Dimmable Ballast for CFL. Add to Part No.)		
			For all arms and specs see pages 321-344.				HID (High Intensity Discharge)		
							MH ⁽⁶⁾ (Metal Halide) 35/MH 50/MH 70/MH 100/MH 150/MH 175/MH		
							HPS ⁽⁶⁾ (High Pressure Sodium) 50/HPS 70/HPS 100/HPS 150/HPS		
							LED See LED specification sheet.	LED See specifications for complete part number.	LED See specifications for complete part number.

H-15412 - 91 - CLR / 1/2" - 91 / SK - 91 / 13/CFL - BCM - M

ORDER EXAMPLE (USE THIS FORMAT TO PLACE ORDER)

Notes:

- (1) H-15412, H-15414, H-15416, H-15418 and H-15420 available for 100W Max INC, 32W Max CFL and 100W Max HID. H-15424 and H-15427 available for 200W Max INC, 57W Max CFL and 175W Max HID
- (2) For interior finish of fixture refer to color chart on pages 344-348.
- (3) Cord Mounting wattage not to exceed 100 for HID. Gray Mesh Cord not available for HID.
- (4) (RB) Remote Ballast is not available for Fluorescent Lamping.
- (5) (PLB) Post Line Ballast must specify 120V or 277V. (PLB) 50W MH requires a 3" dia. pole. (PLB) 70W and 100W MH require a 4" dia. pole. (PLB) 50W, 70W, 100W and 150W HPS require a 3" dia. pole.
- (6) Socket Bases: INC and HID are medium base. CFL is GX24Q.

Cord-hung fixtures: suitable for dry location only.
Stem-hung fixtures: suitable for damp & dry location.
Gooseneck, post mount & wall bracket fixtures: suitable for wet, damp & dry location.