




**HI-LITE MFG.
CO., INC.**
13450 Monte Vista Avenue
Chino, California 91710
Telephone: (909) 465-1999
Fax: (909) 465-0907

Job Name: _____
Type: _____
Quantity: _____

Item Number	Height (A)	Width (B)
H-23640	12 3/4"	14"
H-23644	21"	19"
H-23648	26"	26"

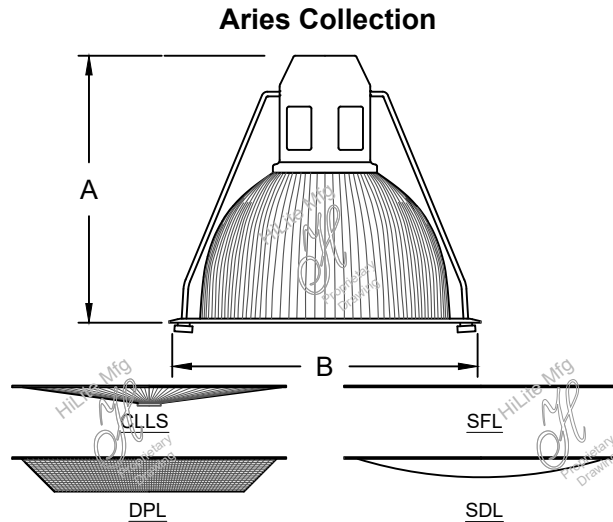

Fixture No.	Fixture Color	Lens Color	Mounting	Mounting Color	Optional Accessories	Accessory Color	Wattage/ Lamp options	Ballast	Voltage
H-23640 H-23644 H-23648	Standard 91 (Black) 93 (White) 95 (Dk. Grn) 96 (Galv.) BR47 (Rust) BK01, GN20 . Upgraded Finishes: ⁽¹⁾ 29, 66, 82, 92, 94, 97, 100, 103, 104, 105, 112, 113, 114, 117, 118, 119, 127, 128, 133, 134, 135, 136, 98, 101, 102, 137, 139, 140, 121, 122, 123, 124, 11, 01, 22, 25, 33, 77, 89, 24, 44, 48, 49. For finish specs see pages 344-348.	RIB (Clear Ribbed) FR (Frost) Colored Lenses ⁽²⁾ PK (Pink) LBL (Light Blue) DBL (Dark Blue) LGRN (Light Green) DGRN (Dark Green) WH (White) RD (Red) AM (Amber)	Mounting Options 1/2" 3/4" Cord Options ⁽³⁾ CB8 (8' Blk Cord) CW8 (8' Wht Cord) CG8 (8' Gray Mesh Cord) Custom Cord Options ⁽³⁾ CB (Black) CW (White) CG (Gray Mesh) Specify length. Stem Options (Stem 1/2") ST Specify length and canopy. HSC (Canopy) SMC (Canopy) Flush Mount Options FHSC FSMC For specs see pages 321-344.	Standard 91 (Black) 93 (White) 95 (Dk. Grn) 96 (Galv.) BR47 (Rust) For all finishes see pages 344-348.	CLLS ⁽⁴⁾ (Conical Lens) SDL ⁽⁴⁾ (Smooth Domed Lens) SFL ⁽⁴⁾ (Smooth Flat Lens) DPL ⁽⁴⁾ (Dropped Lens) FX (Flexible tubing for cord mount fixture only) For specs see pages 321-344.	RIB (Clear Ribbed) CLR (Clear) FR (Frost) CLR (Clear) FR (Frost) RIB (Clear Ribbed) Standard 91 (Black) 93 (White) 95 (Dk. Grn) 96 (Galv.) BR47 (Rust) For all finishes see pages 344-348.	Incandescent (6) (Fixture is standard 200W. Do not specify.) CFL (6) (Compact Fluorescent) 13/CFL 18/CFL 26/32/42/CFL 26/CFL 32/CFL 42/CFL 57/CFL DMB (Dimmable Ballast for CFL. Add to Part No.) HID (High Intensity Discharge) MH (6) (Metal Halide) 35/MH 50/MH 70/MH 100/MH 150/MH 175/MH HPS (6) (High Pressure Sodium) 50/HPS 70/HPS 100/HPS 150/HPS	Ballast option not available for INC. RB ⁽⁵⁾ (Remote) BCM (Canopy Mount) For specs see pages 341-343.	Incandescent (Fixture is standard 120V. Do not specify.) CFL M (Multi 120/277V) HID RB and BCM M (Multi 120/208/240/277V)
							LED See LED specification sheet.	LED See specifications for complete part number.	LED See specifications for complete part number.

H-23640 - 91 / RIB - 1/2" / 91 - CLLS / RIB - 13/CFL - BCM - M

ORDER EXAMPLE
(USE THIS FORMAT TO PLACE ORDER)

Notes:

- Arms will be painted to match copper and brass finishes.
- Colored Lenses are available for H-23640 only.
- Cord Mounting wattage not to exceed 100 for HID. Gray Mesh Cord not available for HID.

- CLLS available for H-23640, H-23644 and H-23648. SDL available for H-23640. SFL available for H-23640, H-23644 and H-23648. DPL available for H-23644 and H-23648.

- (RB) Remote Ballast not available for Fluorescent Lamping.

- Socket Bases: INC and HID are medium base. CFL is GX24Q.

Cord-hung fixtures: suitable for dry location only.
Stem-hung fixtures: suitable for damp & dry location.